

AXIS Camera Station S9301 Workstation

Flexible, plug-and-play workstation

Extensively tested and validated with a wide range of Axis products, this flexible workstation can be used either as a client when connected to the server, or as a server when used in combination with AXIS S30 Series. It supports up to two 4K resolution monitors for optimal overview. With a micro form factor, it's ideal wherever space is limited. It comes preloaded with AXIS Camera Station client software. Plus, the integrated AXIS Recorder Toolbox installation wizard ensures quick and easy installation. Furthermore, it includes next business day on-site hardware replacement, 5-year warranty, and one point-of-contact for support.

- > Scalable and powerful solution
- > Supports up to two 4K monitors
- > AXIS Camera Station client software included
- > Extensive support and 5-year warranty




AXIS Camera Station S9301 Workstation

Hardware			To read more about Axis cybersecurity support, go to
Processor	Intel [®] Core [™] processor		axis.com/cybersecurity
Memory	8 GB (2 X 4 GB)	General	
Graphics card	Intel® UHD graphics	Operating system	n Microsoft® Windows® 10 IoT Enterprise LTSC 2021 Built-in operating system recovery: yes
Power	Max 90 W, 100–240 V AC, 1.5 A 50/60 Hz, 19,5 V DC, 4,62 A External AC/DC adapter		Operating system drive: 256 GB SSD
		Security	Support for encrypted operating system drive FIPS 140-2 level 2 certified Trusted Platform Module (TPM 2.0)
Connectors	Front side: 1x Audio line in/out 1x Universal audio jack 1x USB 3.2 1x USB 3.2 gen 2 2x2 USB-C port Rear side: 1x RJ45 Ethernet 4x USB 3.2 2x DisplayPort™ 1.4a	Operating conditions	0 °C to 45 °C (32 °F to 113 °F) Humidity 20–80% RH (non-condensing)
		Storage conditions	-40 °C to 65 °C (-40 °F to 149 °F) Humidity 5–95% RH (non-condensing)
		Approvals	EMC EN 55032 Class B, EN 55035, EN 61000-3-2, EN 61000-3-3, FCC Part 2 &t 15 Class B, ISED ICES-003 Class B, RCM AS/NZS CISPR 32 Class B,
Video			KS C 9832 Class B, KS C 9835, VCCI 32-1 Class B, BSMI
Video streaming	Live view: 1 stream x 4K at 30 fps 4 split x 1080p at 30 fps 9 split x 720p at 30 fps 16 split x 720p at 30 fps 25 split x 360p at 15 fps 36 split x 360p at 15 fps Any combination of the above for maximum two 4K monitors where only one monitor can show streams at 30 fps. Playback: Supports the same split scenarios as for live view.		Safety IEC/EN/UL 62368-1, EN 62311, NOM-019-SCFI-1998
		Compliance	TAA (Trade Agreements Act)
		Dimensions	182 x 36 x 178 mm (7.2 x 1.4 x 7.0 in)
		Weight	1,1 kg (2.4 lbs)
		Included accessories	AC power adapter with wall plug power cord
		Optional accessories	Axis joysticks and control boards For more accessories, see <i>axis.com</i>
Cybersecurity		Services	Next Business Day Onsite Support
Edge security	Hardware: Secure boot, Axis Edge Vault with secure keystore (CC EAL4+, FIPS 140-2 level 2 certified hardware protection of cryptographic operations and keys)	Warranty	5-year warranty, see axis.com/warranty
		Export control	This product is subject to export control regulations, and you should always comply with all applicable national and
Documentation	AXIS Hardening Guide AXIS Vulnerability Management Policy AXIS Security Development Model To download documents, go to axis.com/support/cybersecu- rity/resources		international export or re-export control regulations.
AXIS Camera Station			

For details about AXIS Camera Station features and functions,

see the AXIS Camera Station datasheet on axis.com

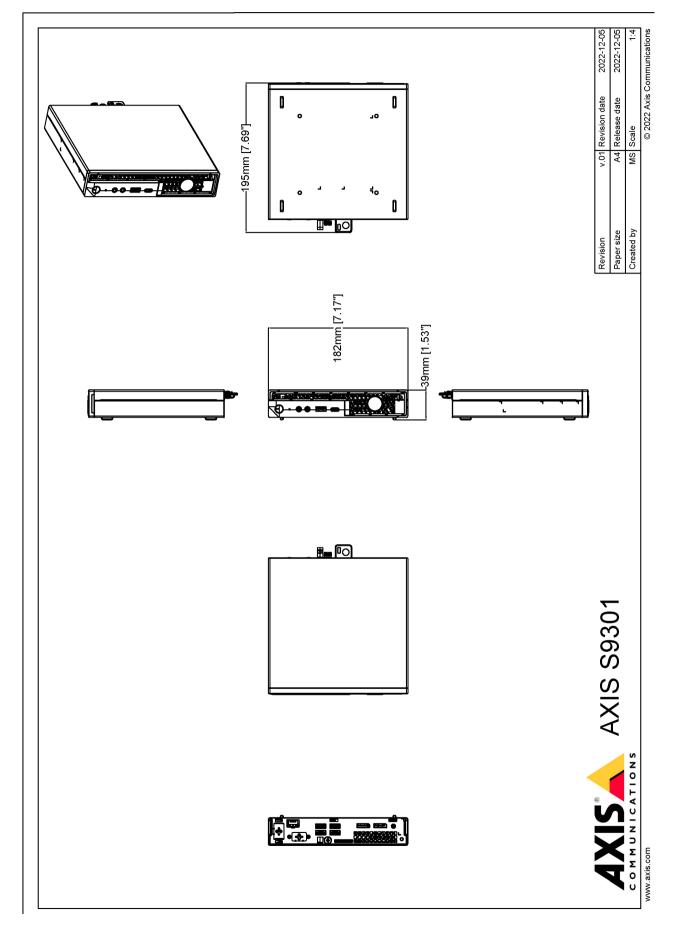



©2022 - 2023 Axis Communications AB. AXIS COMMUNICATIONS, AXIS, ARTPEC and VAPIX are registered trademarks of Axis AB in various jurisdictions. All other trademarks are the property of their respective owners. We reserve the right to introduce modifications without notice.