


LS550UDH-EG

55" FHD Video Wall Display Unit (Ultra Narrow Bezel 1.74mm)

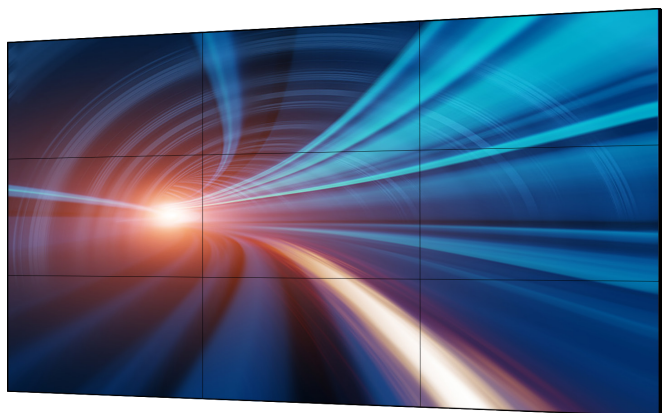

Technical Specification

Model

Model	LS550UDH-EG
-------	-------------

Display

Diagonal	55"(16:9)
----------	-----------

LCD Technology	IPS
----------------	-----

Resolution	1920×1080 (FHD)
------------	-----------------

Bezel Width	B2B: 1.74mm (Panel Bezel to Panel Bezel), 1.3mm(T/L), 0.44mm(B/R) A2A: 2.49mm (Active area to Active area), 1.74mm(T/L), 0.75mm(B/R)
-------------	---

Backlight	Direct LED
-----------	------------

Brightness	700 cd/m ²
------------	-----------------------

Contrast Ratio	1000:1
----------------	--------

Pixel Density	40dpi
---------------	-------

Viewing Angle	H178°, V178°
---------------	--------------

Response Time	8ms
---------------	-----

Display Colors	10bit (1.07B)
----------------	---------------

Color Temperature	10,000K
-------------------	---------

Surface Treatment	Haze 28%, 2H
-------------------	--------------

MTBF	50,000h
------	---------

Signals

Input	CVBS(BNC)×1, VGA(D-Sub)×1, DVI-D×1, HDMI×1, RS232×1, USB×2, Audio×1, IR×1
-------	---

Output	CVBS(BNC)×1, RS232×1, HDMI×2, VGA×1, Audio×1
--------	--

Features:

- Industrial level IPS LCD panel, suitable for continuous 24h/7 operation
- Ultra-narrow 1.74mm B-to-B (Panel Bezel to Panel Bezel) design
- Anti-glare and high brightness panel, vivid and memorable image quality
- Professional LED backlight technology for high color uniformity
- Built-in 3D noise reduction system and picture splicing function
- Abundant interfaces HDMI, DVI, VGA, BNC, USB, supporting HDMI daisy chain
- Infrared, RS232 dual mode, supporting remote control by computer
- Professional thermal design to extend equipment lifespan
- Built-in power, low energy consumption, ultra-quiet
- Modular structure design, multiple installation modes
- Widely used in surveillance center, command center, meeting room, commercial display scenes, etc.



General

Power Supply	AC100V~AC240V, 50/60 Hz	
Power Consumption (Standby)	<0.5W	
Power Consumption (Typical)	195W	
Power Consumption (Max.)	220W	
Energy Efficiency Class (EU)	G	
Installation Mode	Floor-standing, wall-mounted	
VESA	600×400mm, M6	
Control Mode	Infrared, RS232 dual mode, supporting remote control by computer	
Net Weight	24kg(52.91lb)	
Gross Weight	31kg(68.34lb)	
Dimension (W×H×D)	1212.2mm×683.0mm×117.7mm(47.7"×26.9"×4.6")	
Package (W×H×D)	1360mm×945mm×280mm(53.5"×37.2"×11.0")	
Work Environment	Temperature	0°C~+40°C
	Humidity	10%RH~90%RH

Dimensions(mm)

